


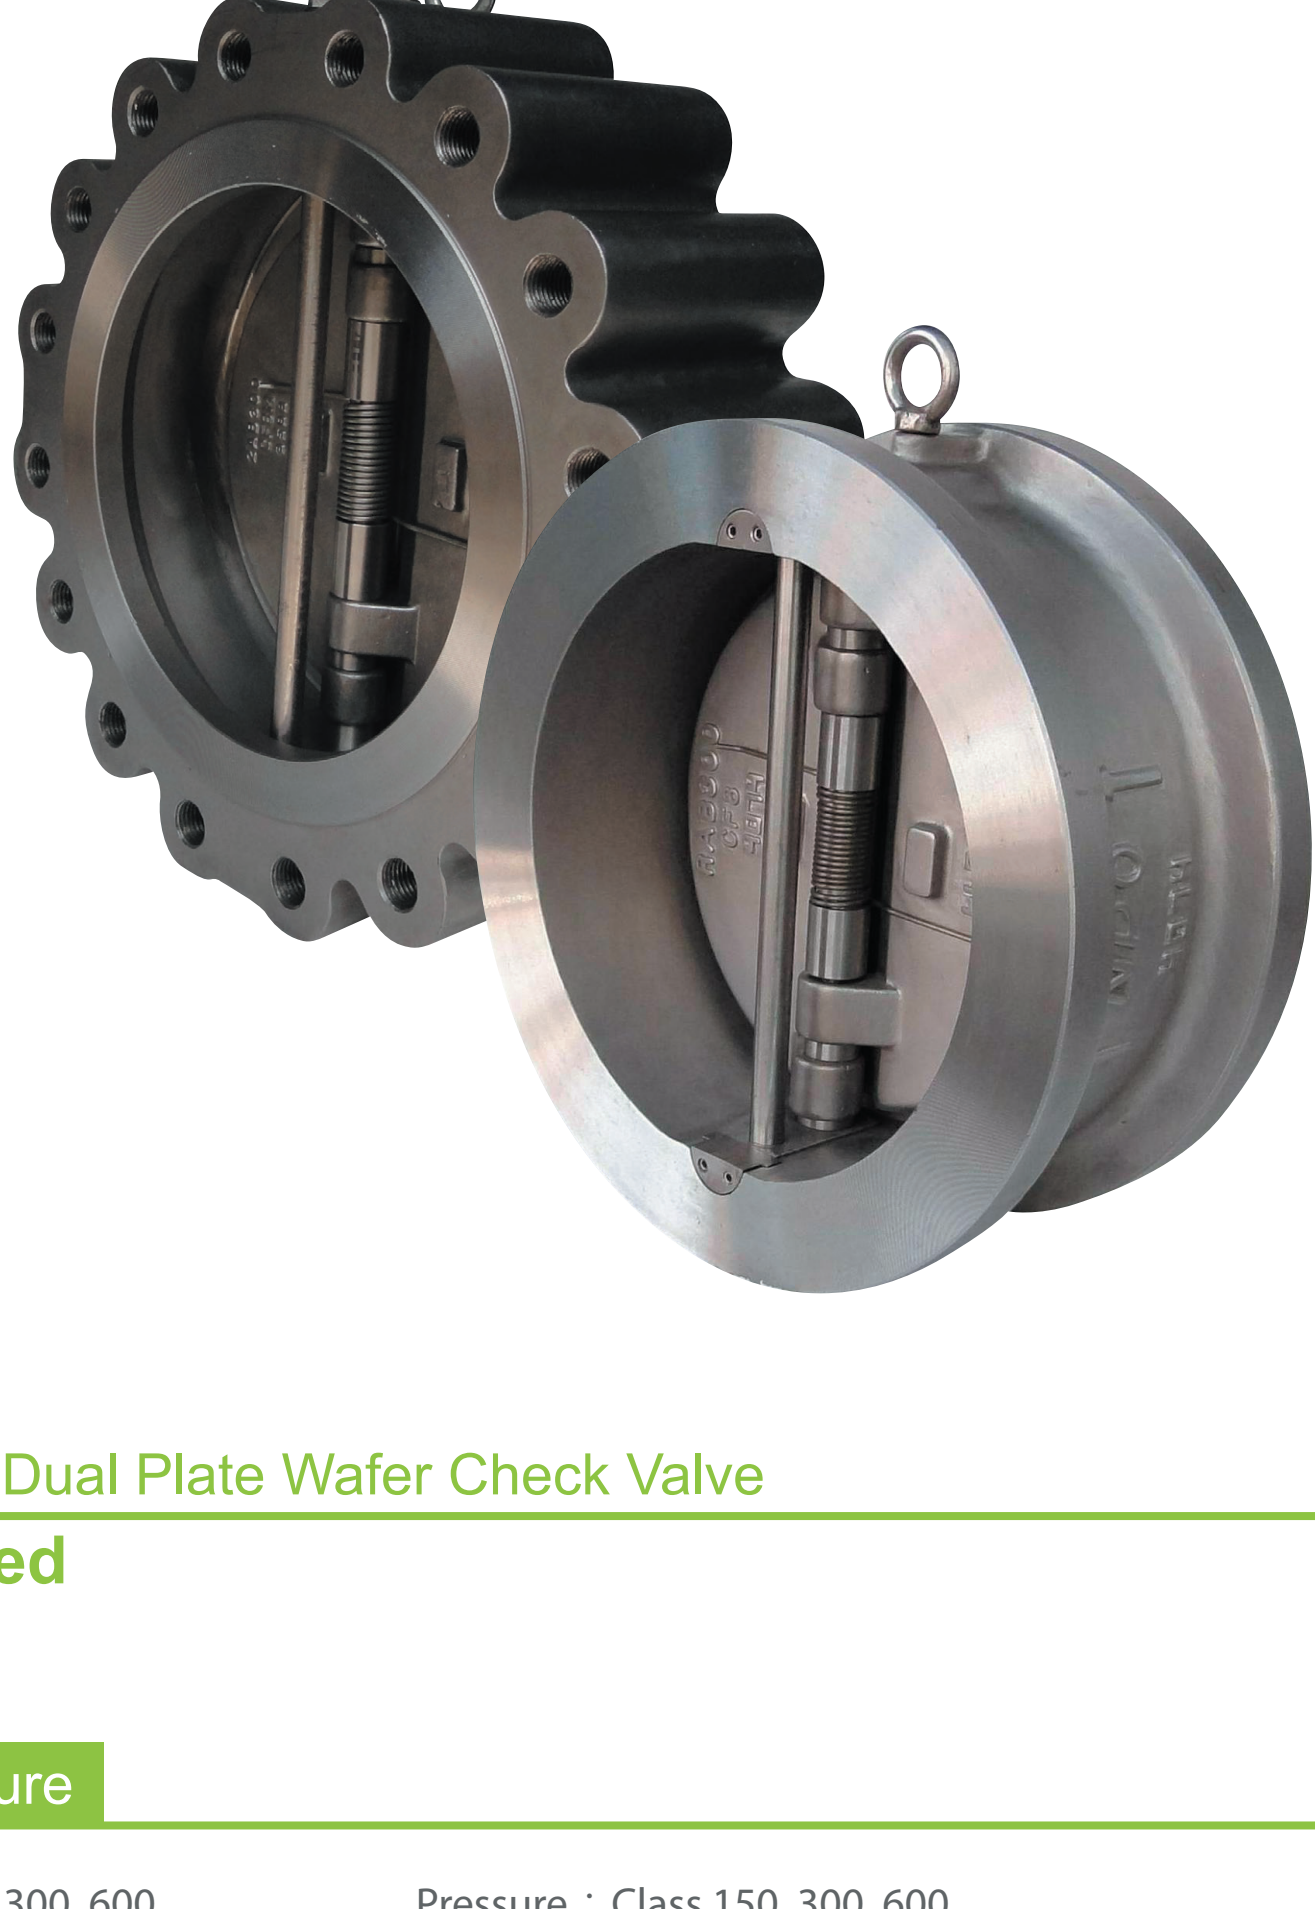

雙瓣式逆止閥 | Dual Plate Wafer Check Valve

K7-Dual plate

產品特點 Feature

壓力等級：Class 150, 300, 600,
900, 1500, 2500

尺寸：2"~24"

Pressure：Class 150, 300, 600,
900, 1500, 2500

Size：2"~24"

Style

- W** - Standard Design Wafer
- WR** - Retainerless Design Wafer
- L** - Standard Design Lugged
- LR** - Retainerless Design Lugged

Pressure Class



- 10** - Australian Standard
- 15** - ASME Class 150
- 30** - ASME Class 300
- 60** - ASME Class 600
- 90** - ASME Class 900
- 150** - ASME Class 1500
- 250** - ASME Class 2500

Body / Disc Material

- W** - A216 WCB
- CM** - A351 CF8M
- C** - A351 CF8
- CB** - A352 LCB
- CC** - A352 LCC
- CI** - Cast Iron A126 Gr B
- CA** - 410SS (A217 CA15)
- D** - Duplex A890 4A
- SD** - Super Duplex A890 5A
- AB** - Aluminum Bronze B148

Seat / Seal

- M** - Metal Seat
- 8** - Stellite 6 Body Seat
- 5** - Stellite 6 Body+Disc Sealing
- C** - Buna-N
- E** - EPDM
- V** - Viton

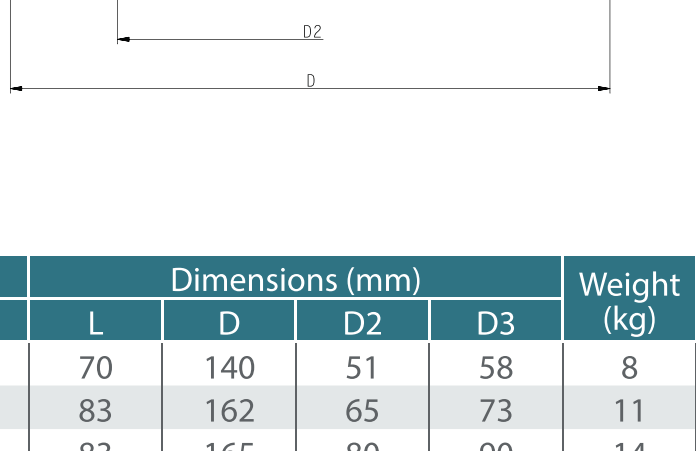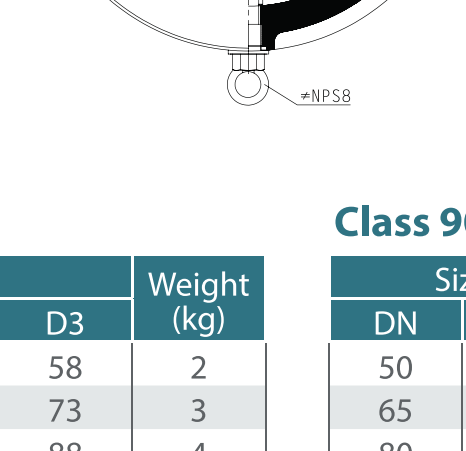

Class 150

Size		Dimensions (mm)					Weight (kg)
DN	NPS	L	D	D2	D3		
50	2"	60	110	51	58	3	
65	2-1/2"	67	128	65	73	4	
80	3"	73	147	80	88	6	
100	4"	73	179	102	108	8	
125	5"	86	214	127	132	15	
150	6"	98	249	152	160	18	
200	8"	127	305	203	210	31	
250	10"	146	359	254	266	51	
300	12"	181	420	305	310	83	




Class 300

500	20"	292	652	500	505	265
600	24"	318	772	600	608	410

Class 600

Size		Dimensions (mm)				Weight (kg)
DN	NPS	L	D	D2	D3	
50	2"	60	110	51	58	4
65	2-1/2"	67	128	65	73	5
80	3"	73	147	80	88	8
100	4"	79	191	102	108	11
125	5"	105	239	127	136	20
150	6"	136	264	152	162	26
200	8"	165	318	200	212	55
250	10"	213	398	250	266	103
300	12"	229	455	305	312	140
350	14"	273	490	337	355	223
400	16"	305	562	387	400	360
450	18"	362	610	438	450	395
500	20"	368	680	498	500	518
600	24"	438	786	591	600	836

Class 600

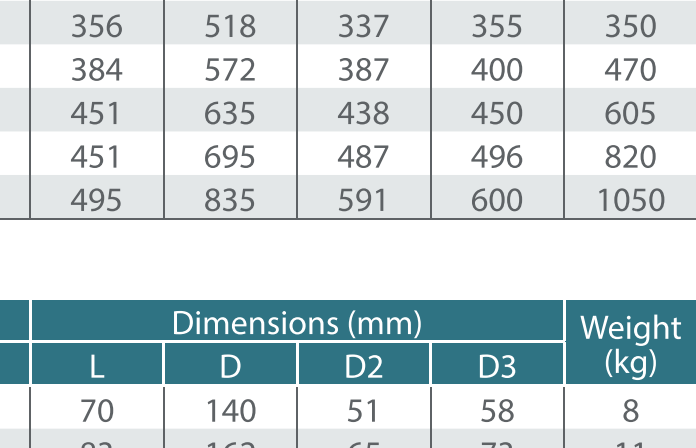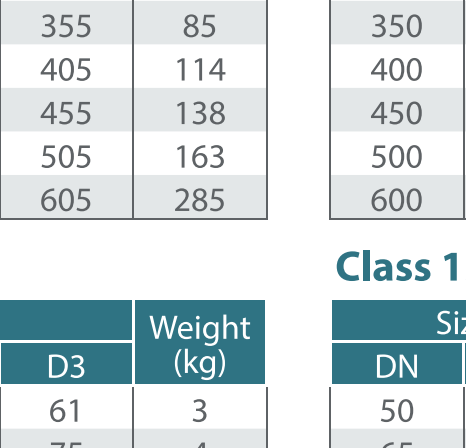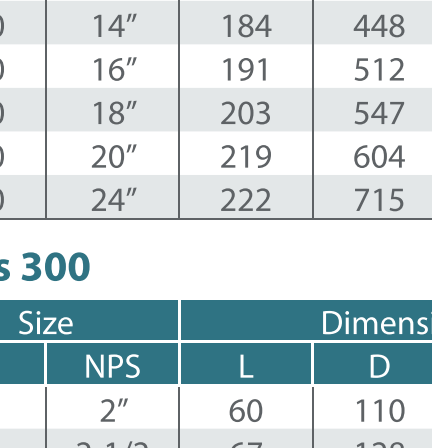

Class 150


125	5"	86	214	127	140	15
150	6"	98	249	152	166	18
200	8"	127	305	203	210	31
250	10"	146	359	254	266	51
300	12"	181	420	305	310	83
350	14"	222	483	350	355	117
400	16"	232	537	400	405	190
450	18"	264	594	450	455	200
500	20"	292	652	500	505	265
600	24"	318	772	600	608	410

Class 600

Size		Dimensions (mm)				Weight (kg)
DN	NPS	L	D	D2	D3	
50	2"	60	110	51	61	4
65	2-1/2"	67	128	65	75	5
80	3"	73	147	80	92	8
100	4"	79	191	102	108	11
125	5"	105	239	127	136	20
150	6"	136	264	152	162	26
200	8"	165	318	200	212	55
250	10"	213	398	250	266	103

Class 300

450	18"	362	610	438	450	395
500	20"	368	680	489	500	518
600	24"	438	786	591	600	836



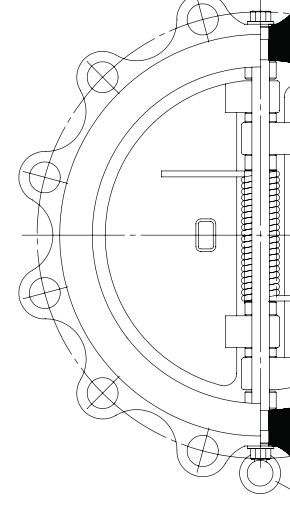


Size		Dimensions (mm)					N	n-Ød	Weight (kg)
DN	NPS	L	QC	D1	D2	D3			
450	18"	362	610	438	450	395			
500	20"	368	680	489	500	518			
600	24"	438	786	591	600	836			

Class 600

Size		Dimensions (mm)					N	n-Ød	Weight (kg)
DN	NPS	L	ØC	D1	D2	D3			
50	2"	60	127	92	51	58	2	8-019	11
65	2-1/2"	67	149	105	65	73	2	8-022.5	7
80	3"	73	168.5	127	80	88	2	8-022.5	10
100	4"	73	200	157	102	108	2	8-022.5	16
125	5"	86	235	186	127	132	2	8-022.5	29
150	6"	98	270	216	152	160	2	8-022.5	37
200	8"	127	298.5	270	203	210	2	8-022.5	66
250	10"	146	362.0	324	254	266	2	12-025.5	31
300	12"	181	432.0	381	305	310	2	12-025.5	131
350	14"	184	476.0	413	350	355	2	12-028.5	119
400	16"	191	540.0	470	400	405	2	16-028.5	183
450	18"	203	578.0	533	450	455	2	16-032	200
500	20"	219	635.0	584	500	505	2	20-032	275
600	24"	222	749.5	692	600	605	2	20-035	314

Class 300

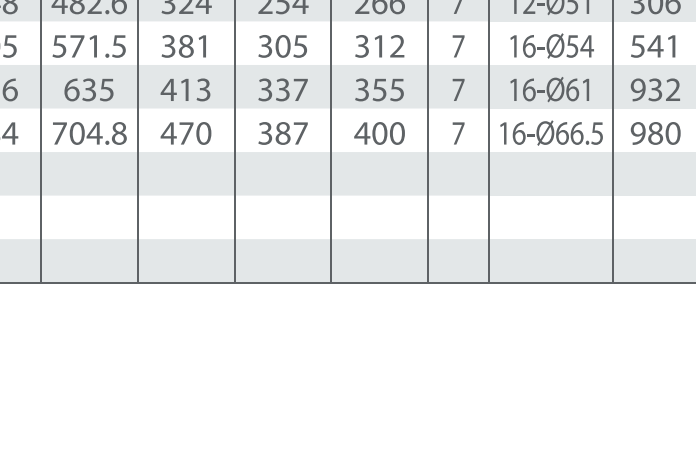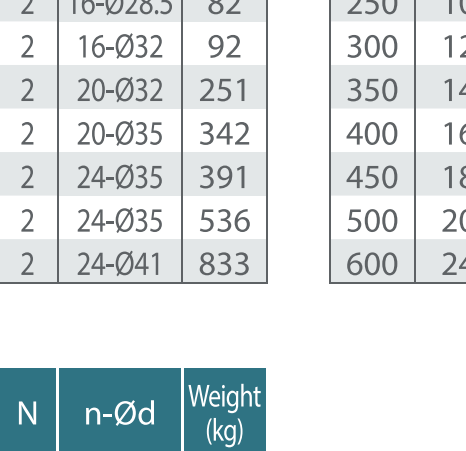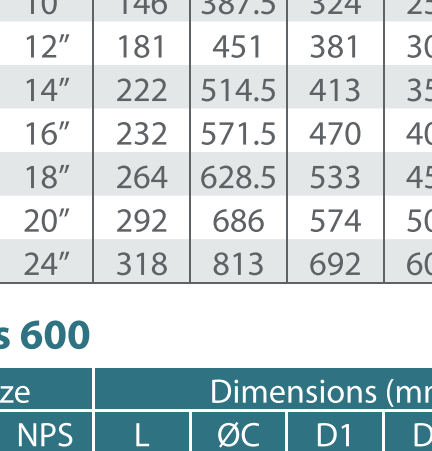

Class 150

Size		Dimensions (mm)					Weight (kg)
DN	NPS	L	ØC	D1	D2	D3	
50	2"	60	120.5	92	51	58	2
65	2-1/2"	67	139.5	105	65	73	2
80	3"	73	152.5	127	80	88	2
100	4"	73	190.5	157	102	108	2
125	5"	86	216.0	186	127	132	2
150	6"	98	241.5	216	152	160	2
200	8"	127	298.5	270	203	210	2
250	10"	146	362.0	324	254	266	2
300	12"	181	432.0	381	305	310	2
350	14"	184	476.0	413	350	355	2
400	16"	191	540.0	470	400	405	2
450	18"	203	578.0	533	450	455	2
500	20"	219	635.0	584	500	505	2
600	24"	222	749.5	692	600	605	2

Class 300

Size		Dimensions (mm)					Weight (kg)
DN	NPS	L	ØC	D1	D2	D3	
50	2"	60	127	92	51	58	7
65	2-1/2"	67	149	105	65	73	7
80	3"	73	168.5	127	80	88	7
100	4"	79	216	157	102	108	7
125	5"	105	266.5	186	127	136	7
150	6"	136	292	216	152	162	7
200	8"	165	349	270	200	212	7
250	10"	213	432	324	250	266	7
300	12"	229	489	381	305	312	7
350	14"	273	527	413	337	355	7
400	16"	305	603	470	387	400	7
450	18"	362	654	533	438	450	7
500	20"	368	724	584	489	500	7
600	24"	438	838	692	591	600	7

Class 600

Size		Dimensions (mm)					Weight (kg)
DN	NPS	L	ØC	D1	D2	D3	
50	2"	60	127	92	51	61	7
65	2-1/2"	67	149	105	65	75	7
80	3"	73	168.5	127	80	88	7
100	4"	79	216	157	102	108	7
125	5"	105	266.5	186	127	136	7
150	6"	136	292	216	152	162	7
200	8"	165	349	270	200	212	7
250	10"	213	432	324	250	266	7
300	12"	229	489	381	305	312	7
350	14"	273	527	413	337	355	7
400	16"	305	603	470	387	400	7
450	18"	362	654	533	438	450	7
500	20"	368	724	584	489	500	7
600	24"	438	838	692	591	600	7



Class 150

Double Flanged Dual Plate Check Valve		Wafer Type Swing
		