



3通牙口端球閥 | 3 Way Threaded End Ball Valve


A3W-SE

產品特點 Feature

工作壓力：1000 PSI
規格：1/4"~2"(DN8~DN50)
全流量、減流量
端口：螺紋NPT, BSPT, BSPF, DIN 2999

Working Pressure: 1000 PSI
Size: 1/4"~2"(DN8~DN50)
Full Port, Reduced Port
Threaded End: NPT, BSPT, BSPF, DIN 2999

產品規格 Specification

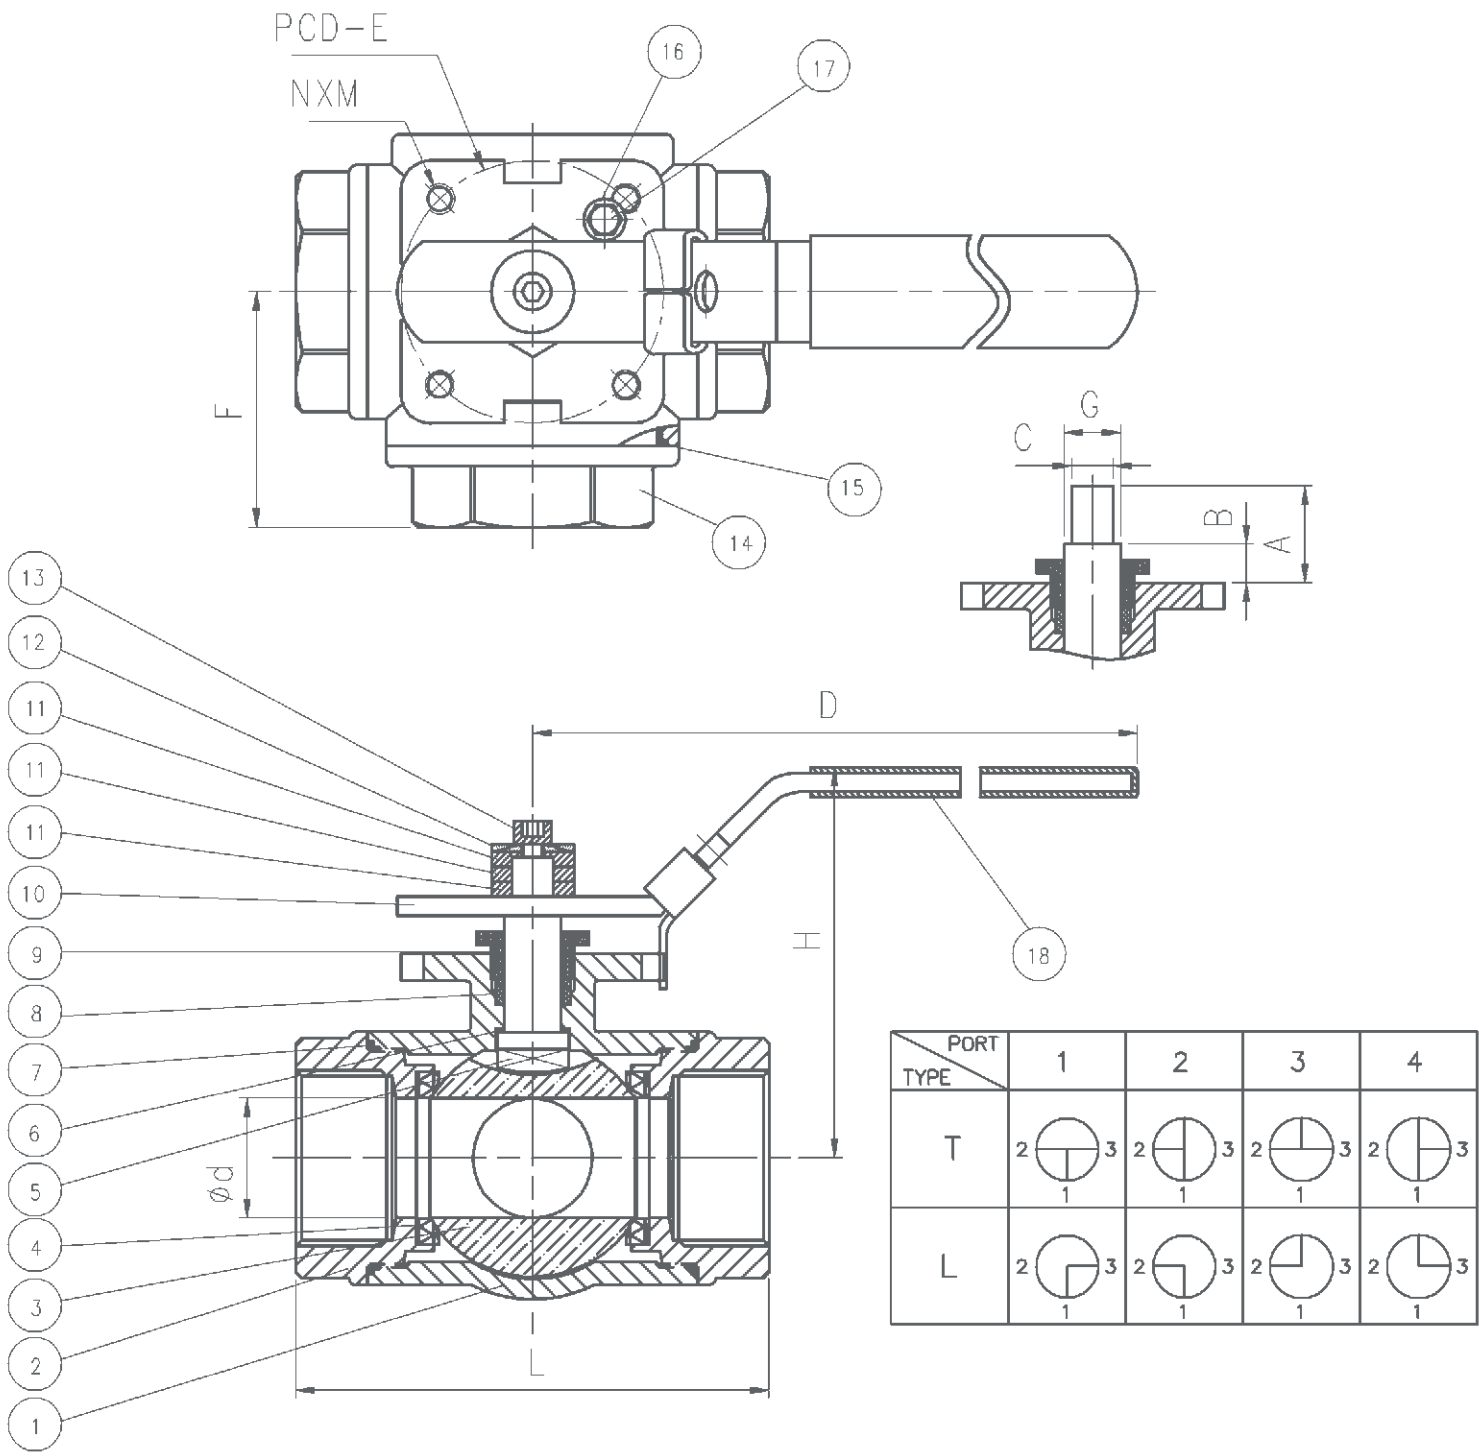

Item	Parts Name		零件名稱		Material 材料
1	Body		本體		A351 Gr. CF8M
2	Cap		端蓋		A351 Gr. CF8M
3	Ball		球		A351 Gr. CF8M
4	Ball Seats		球座		PTFE
5	Stem		軸心		SS316
6	Thrust Washer		小薄片		PTFE
7	End Seals		大薄片		PTFE
8	Stem Packing		中口		PTFE
9	Gland		套筒		SS304
10	Handle		把手		SS304
11	Washer		華司		SS304
12	Washer		華司		SS304
13	Handle Nut		把手螺帽		SS304
14	Cap		端蓋		A351 Gr. CF8M
15	End Seals		大薄片		PTFE
16	Stopper		檔把手螺帽		SS304
17	Screw		螺絲		SS304
18	Handle Sleeve		把手膠套		VINYL GRIP

Dimension 尺寸

Unit : mm

Item		d	L	H	D	F	A	B	C	N	M	E	G
Size	NPS												
1/4"	DN8	11.0	69.3	60.0	132	34.7	11.00	6.00	9	4	M5*0.80	42	12.0
3/8"	DN10	11.0	69.3	60.0	132	34.7	11.00	6.00	9	4	M5*0.80	42	12.0
1/2"	DN15	12.5	75.7	61.8	132	38.3	10.35	5.35	9	4	M5*0.80	42	12.0
3/4"	DN20	16.0	86.6	80.8	177	44.7	13.85	6.85	11	4	M6*1.00	50	15.0
1"	DN25	20.0	103.0	86.2	177	50.8	20.00	8.50	11	4	M6*1.00	50	15.0
1-1/4"	DN32	25.0	118.2	90.8	205	57.7	19.35	7.85	11	4	M6*1.00	50	15.0
1-1/2"	DN40	32.0	125.8	102.6	205	62.7	25.75	10.25	11	4	M8*1.25	70	15.0
2"	DN50	38.0	149.0	110.8	225	74.6	25.25	9.75	14	4	M8*1.25	70	18.5

■ We reserve the right to modify the design / specifications without previous notice for better quality.
■ 我方有權隨時變更設計/規格，以便提供品質優良的產品。