




二片式球閥-平台架-2000PSI | 2-PC Ball Valve-ISO mounting pad-2000PSI EA-23H

產品特點 Feature

工作壓力：2160 PSI	Working Pressure: 2160 PSI
規格：1/4"~2"(DN8~DN50)	Size: 1/4"~2" (DN8~DN50)
全流量	Full Bore
端口：螺紋NPT, BSPT, BSPF, DN 2999	Ends: Threaded NPT, BSPT, BSPF, DIN 2999
防爆軸心	Blow-out-proof Stem
選擇性要求：帶鎖把手	Optional: Locking Handle
驅動平台	ISO 5211 Mounting Pad
防火設計符合API607第6版	Fire Safe Design to API607 6th Edition

產品規格 Specification

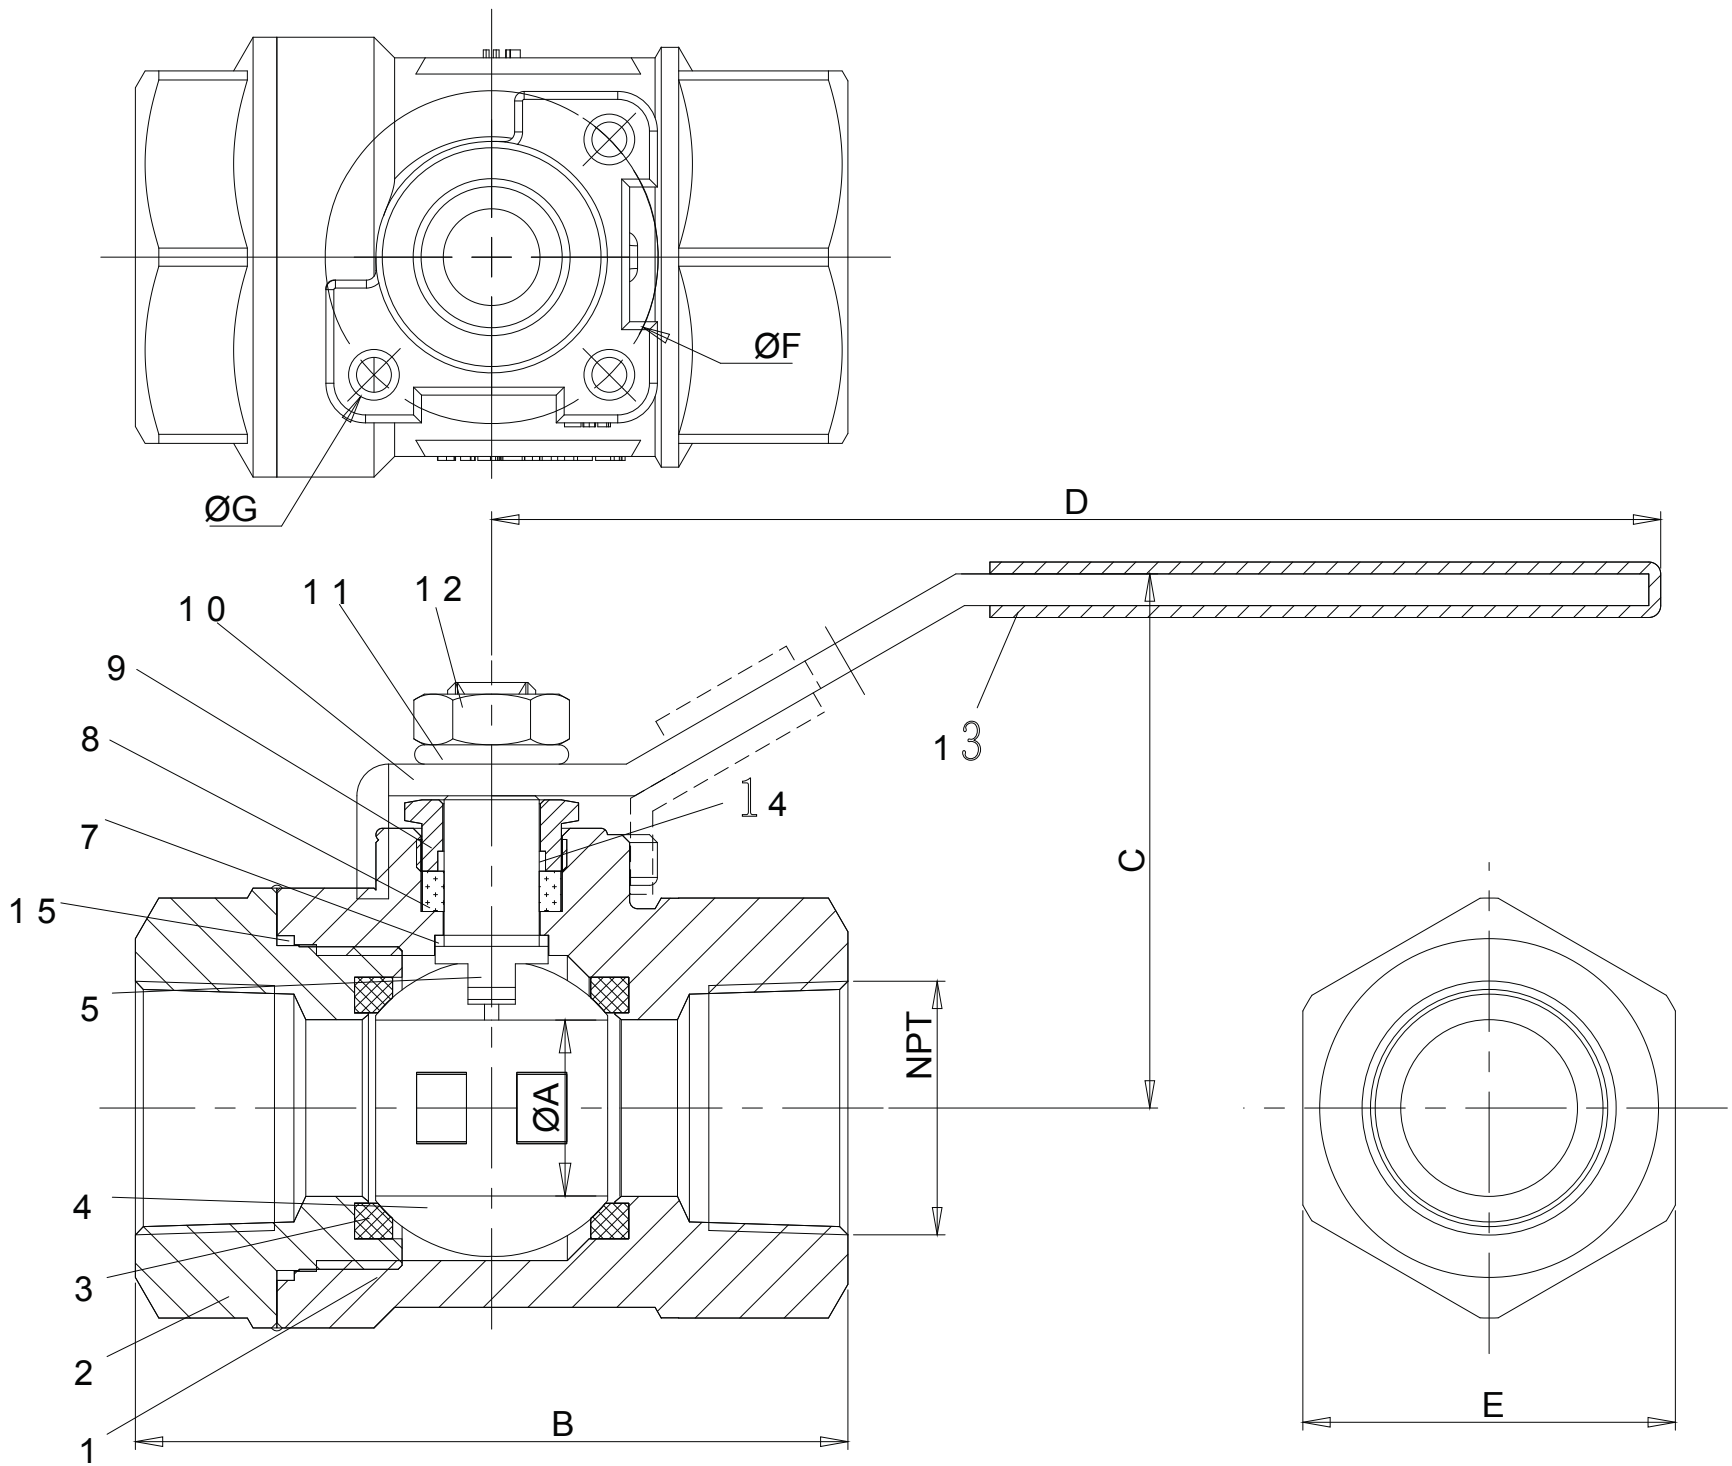

ITEM	PARTS NAME	MATERIAL		Q'TY
1	BODY	WCB	CF8M	1
2	END CAPS	WCB	CF8M	1
3	SEATS	TFM 1600		2
4	BALL	CF8M/ 316		1
5	STEM	SUS 316		1
7	GASKET	TFM 1600		1
8	SEAL	TFM1600		1
9	PACKING GLAND	SUS 304		1
10	HANDLE	SUS 304		1
11	SPRING WASHER LEVER	SUS 304		1
12	LEVER NUT	SUS 304		1
13	PLASTIC COATING	VINYL		1
14	GLAND BUSH	PTFE		1
15	BODY GASKET	TFM1600		1

Dimension 尺寸									Unit: mm
TAB	Size mm inch		A	B	C	D	E	F	ISO PATTERN
02	8	1/4	10	67.3	45	106	25.3	36	M5 F03
03	10	3/8	10	67.3	45	106	25.3	36	M5 F03
04	15	1/2	12.7	67.3	49	106	32	36	M5 F03
06	20	3/4	17.5	78.2	63.8	145	39	42	M5 F04
10	25	1	22.2	89.9	67.4	145	47	42	M5 F04
12	32	1 1/4	25.4	101.9	73.7	192	57	50	M6 F05
14	38	1 1/2	32	108.2	78.5	192	64	50	M6 F05
20	50	2	38.1	125.5	85.5	192	80	50	M6 F05

■ We reserve the right to modify the design / specifications without previous notice for better quality.
■ 我方有權隨時變更設計/規格，以便提供品質優良的產品。