




五片式球閥 | 5-PC Ball Valve

EA-29U

產品特點 Feature

工作壓力：3000 PSI	Working Pressure: 3000 PSI
規格：1/4"~2"	Size: 1/4"~2"
端口：ANSI B1. 20. 1(NPT)	Threaded End: ANSI B1. 20. 1(NPT)
DIN 2999, DIN259	DIN 2999, DIN259
套焊端：ANSI B16. 11 or DIN 3239	Socket Weld End: ANSI B16. 11 or DIN 3239
對焊端：ANSI B16. 25 or DIN 3239	Butt Weld End: ANSI B16. 25 or DIN 3239

產品規格 Specification

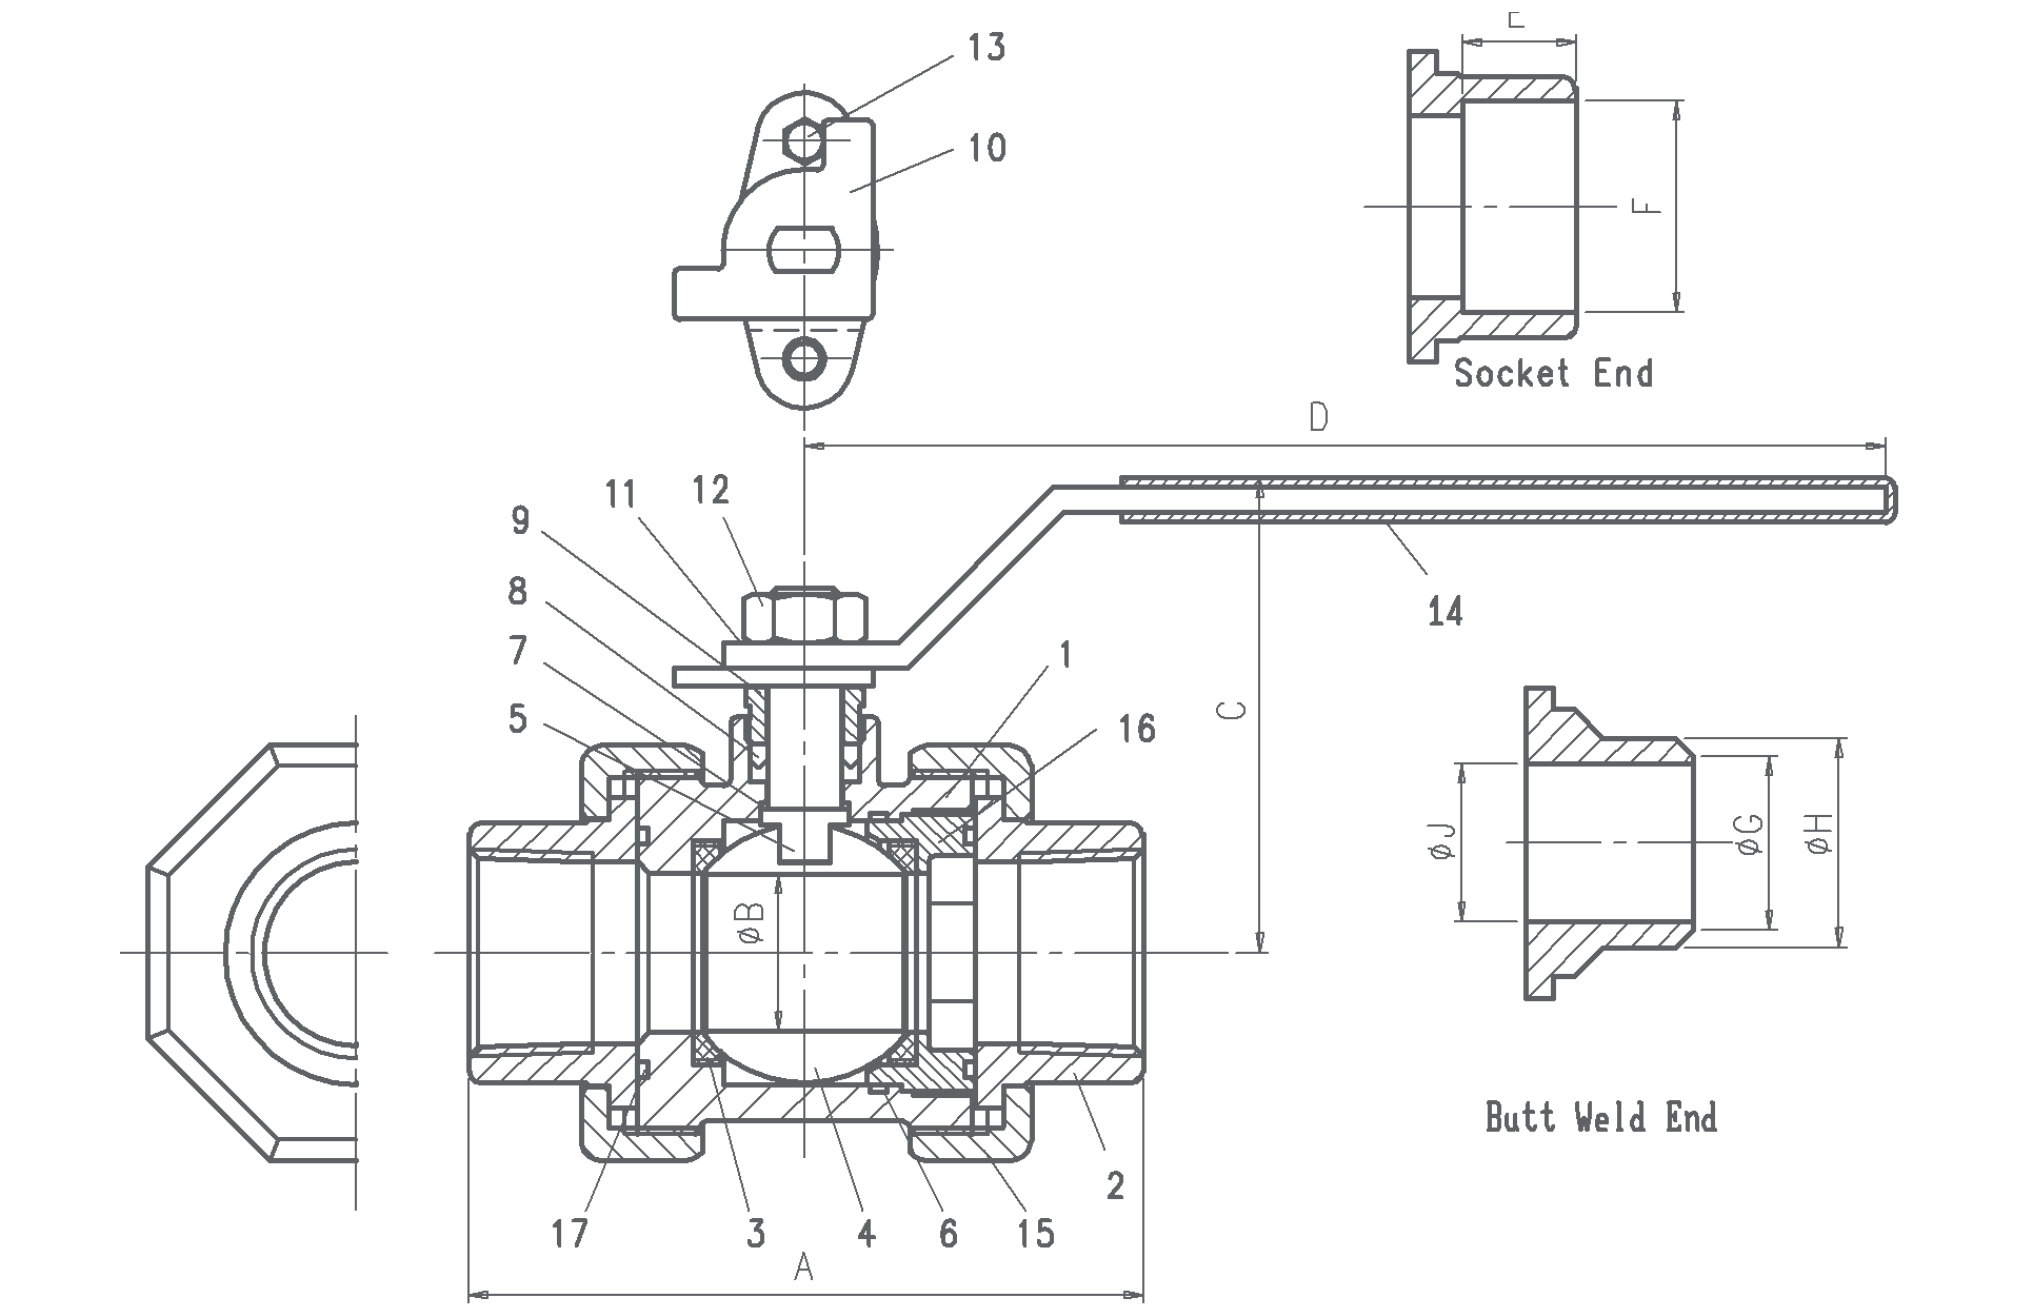

Item	Parts Name	零件名稱	Material 材料	
			Stainless Steel 不鏽鋼	Carbon Steel 碳鋼
1	Body	本體	A351-CF8M	A216-WCB
2	Union End	由任端	A351-CF8M	A216-WCB
3	Seats	球座	2nd PTFE	2nd PTFE
4	Ball	圓球	CF8M/SUS316	CF8M/SUS316
5	Stem	軸心	SUS316	SUS316
6	Body Seal	大薄片	2nd PTFE	2nd PTFE
7	Gasket	小薄片	PTFE	PTFE
8	Seal	中口	2nd PTFE	2nd PTFE
9	Gland Packing	六角片	SUS304	SUS304
10	Stop Plate	檔板	SUS304	SUS304
11	Handle	把手	SUS304	SUS304
12	Lever Nut	把手螺帽	SUS304	SUS304
13	Stop Screw	檔把手螺絲	SUS304	SUS304
14	Plastic Coating	塑膠套	VINYL	VINYL
15	Union Nut	由任螺帽	A351-CF8M	A216-WCB
16	Insert	鎖牙片	A351-CF8M	A216-WCB
17	Union Seal	由任密封圈	2nd PTFE	2nd PTFE

Dimension 尺寸		Unit : mm								
Item		A	B	C	D	E	F	G	H	J
Size	NPS									
1/4"	DN8	90	11.1	61	105.0			13	17.2	11.1
3/8"	DN10	90	11.1	61	105.0			13	17.2	11.1
1/2"	DN15	90	15.8	61	105.0	11.2	22.0	17	21.3	15.8
3/4"	DN20	94	20.5	70	125.5	14.2	27.3	22	26.9	20.5
1"	DN25	108	25.4	74	175.5	18.3	34.0	28	33.7	25.4
1-1/4"	DN32	116	31.8	82	198.2	18.3	42.8	37	42.4	33.8
1-1/2"	DN40	132	38.1	89	248.5	18.3	48.9	43	48.3	39.8
2"	DN50	144	50.0	97	248.5	21.3	61.4	54	60.3	50.8

■ We reserve the right to modify the design / specifications without previous notice for better quality.

■ 我方有權隨時變更設計/規格，以便提供品質優良的產品。